



Professional Conference System

Conference




Technical Data

| | |
|--------------------|---|
| Type | : Condenser |
| Frequency Response | : 60 Hz-16kHz |
| Output Impedance | : 200 ohm |
| Sensitivity | : -40dB+/-2dB |
| Polar Pattern | : Super Cardioid |
| Output | : Balanced / No Balanced |
| Recording Output | : 500mV 200 Ohm |
| AC Power Input | : AC 200V 50 Hz |
| Unit Mic Cable | : 2.1 m |
| SYSTEM | : It can be connected up to 60 units (with 30 units each line). |



1. Header.
2. Circle Indicator.
3. Limited Indicator of the delegate unit.
4. Working Indicator.
5. Electric volume switches, volume decrease when press the bottom.
6. Electric volume switches, volume increase when press the bottom.
7. Header switches.
8. Loudspeaker.
9. For earphone
10. Sponge.
11. Priority button. Promote and conduct an orderly disclined discussion (sc16c).

Dimension

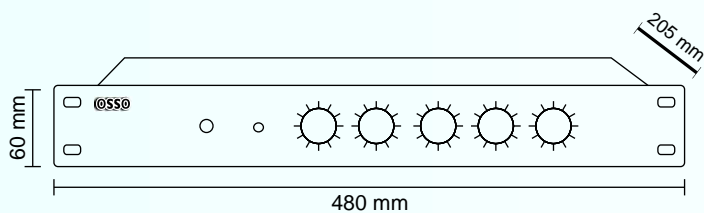

Professional Conference System

SYSTEM CONJUNCTION

