

U-550H SPECIFICATIONS :**1. COMPREHENSIVE PERFORMANCE**

CARRIER FREQUENCY : UHF550MHz
 FREQUENCY STABILIZATION : LESS THAN ± 30 ppm
 DYNAMIC RANGE : MORE THAN 90dB
 TOTAL HARMONIC DISTORTION : LESS THAN 0.5%
 FREQUENCY RESPONSE : 40HZ--15KHZ ± 3 dB
 AUDIO OUTPUT LEVEL : SEPARATE TYPE : 0-- ± 400 mV
 MIX TYPE : 0-- ± 200 mV

2. FIXED RECEIVER

POWER SUPPLY : DC 17V
 CONSUME POWER : 4 Watt
 SIGNAL/NOISE RATIO : MORE THAN 90dB
 IMAGE & SPURIOUS REJECTION : MORE THAN 80db
 BORDER UPON CHANNEL REJECTION : MORE THAN 80db
 RECEIVING SENSITIVITY : 10dBuV(SINAD=30dB)
 DE-EMPHASIS : 50us

3. HANDLING MICROPHONE

TRANSMITTER POWER : 8.5mW
 MODULATION TYPE : FM,F3F
 MAX DEVIATION : ± 25 Khz
 SPURIOUS EMISSION : MORE THAN 40dB(WITH CARRIER)
 BATTERY VOLTAGE : 1.5Vx3
 CONTINUOUS USING : 6 hours

ULS-8H SPECIFICATIONS :**1. COMPREHENSIVE PERFORMANCE**

CARRIER FREQUENCY : UHF700 ~ 870MHz
 FREQUENCY STABILIZATION : LESS THAN ± 30 ppm
 DYNAMIC RANGE : MORE THAN 90dB
 TOTAL HARMONIC DISTORTION : LESS THAN 0.5%
 FREQUENCY RESPONSE : 40HZ--15KHZ ± 3 dB
 AUDIO OUTPUT LEVEL : SEPARATE TYPE : 0-- ± 400 mV
 MIX TYPE : 0-- ± 200 mV

2. FIXED RECEIVER

POWER SUPPLY : AC 220V 50/60Hz
 CONSUME POWER : 4 Watt
 SIGNAL/NOISE RATIO : MORE THAN 90dB
 IMAGE & SPURIOUS REJECTION : MORE THAN 80db
 BORDER UPON CHANNEL REJECTION : MORE THAN 80db
 RECEIVING SENSITIVITY : 10dBuV(SINAD=30dB)
 DE-EMPHASIS : 50us

3. HANDLING MICROPHONE

TRANSMITTER POWER : 8mW
 MODULATION TYPE : FM,F3F
 MAX DEVIATION : ± 45 Khz
 SPURIOUS EMISSION : MORE THAN 40dB(WITH CARRIER)
 BATTERY VOLTAGE : 3Volt (1.5V AAx2) battery
 CONTINUOUS USING : 6 hours

VLS-8H SPECIFICATIONS :**1. COMPREHENSIVE PERFORMANCE**

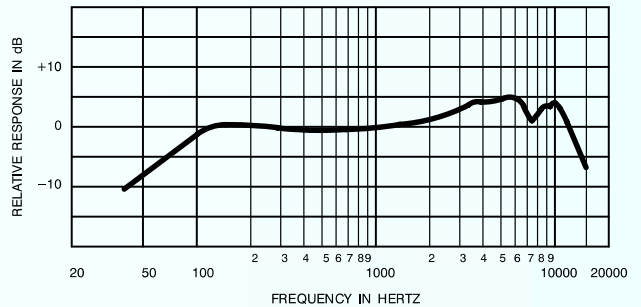
CARRIER FREQUENCY : VHF170 ~ 280MHz
 FREQUENCY STABILIZATION : LESS THAN ± 30 ppm
 DYNAMIC RANGE : MORE THAN 90dB
 TOTAL HARMONIC DISTORTION : LESS THAN 0.5%
 FREQUENCY RESPONSE : 40HZ--15KHZ ± 3 dB
 AUDIO OUTPUT LEVEL : SEPARATE TYPE : 0-- ± 200 mV

2. FIXED RECEIVER

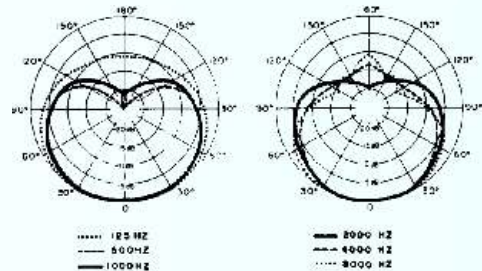
POWER SUPPLY : AC 220V 50/60Hz
 CONSUME POWER : 4 Watt
 SIGNAL/NOISE RATIO : MORE THAN 90dB
 IMAGE & SPURIOUS REJECTION : MORE THAN 80db
 BORDER UPON CHANNEL REJECTION : MORE THAN 80db
 RECEIVING SENSITIVITY : 10dBuV(SINAD=30dB)
 DE-EMPHASIS : 50us

3. HANDLING MICROPHONE

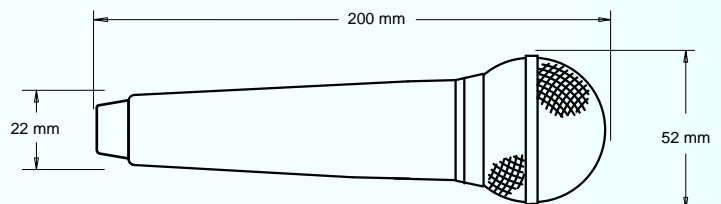
TRANSMITTER POWER : 8mW
 MODULATION TYPE : FM,F3F
 MAX DEVIATION : ± 25 Khz
 SPURIOUS EMISSION : MORE THAN 40dB(WITH CARRIER)
 BATTERY VOLTAGE : 9 Volt battery
 CONTINUOUS USING : 6 hours

MS-58 SPECIFICATIONS :**Frequency Response
50 to 15,000 Hz****Polar Pattern**

Unidirectional (Cardiod), rotationally symmetrical about microphone axis, uniform with frequency



Sensitivity (at 1,000 Hz Open Circuit Voltage)
 54.5 dBV/Pa (1.85 mV)
 1 Pa = 94 dB SPL

Overall Dimensions**OVERALL DIMENSIONS**

Specifications are subject to change without prior notice for future improvement