



Professional Power Amplifier

MS - 2000

MS - 3000

MS - 4000



Products introduce

1. The 'MS' series is a high performance line of amplifier designed to provide exceptional sound quality. The high efficiency class "H" intelligent power supply lower AC current consumption and cooling requirements providing greater output and reliability. The "MS" series offers a complete set of professional features that increase performance and flexibility.

2. Advanced protection management :

The advanced protection management system of the "MS" series amplifiers offers a complete set of protections for both the amplifier and the loudspeaker systems.


1. Soft Start
2. Over current protection
3. Rearm able overload and short circuit protection
4. DC protection at the output stage
5. Dynamic distortion control with clip limiting (6:1)
6. Thermal protection

SPECIFICATIONS :

	MS-2000	MS-3000	MS-4000
8 ohm Stereo Power	600W+600W	700W+700W	1000W+1000W
4 ohm Stereo Power	900W+900W	1050W+1050W	1600W+1600W
Frequency Response (+0/-0.5dB)	20Hz ~ 20kHz	20Hz ~ 20kHz	20Hz ~ 20kHz
Input Sensitivity (rated Power at 8 Ohm)	0dB(1.0V)	0dB(1.0V)	0dB(1.0V)
Input Impedance (balanced)	20k Ohm	20k Ohm	20k Ohm
Signal/noise Ratio	>95dB	>95dB	>95dB
Damping Factor (1kHz, 8 Ohm)	>300:1	>300:1	>300:1
Circuit Type	Class H	Class H	Class H
Dimensions (WxDxH) mm	482X495X89	482X495X133	482X495X133
Weight (kg)	25,6	32,5	41,5
Protection	Short Circuit, Current Limited DC Fault, AC Line Fuse, Limiter, Thermal Cut Off Power Up/Down Transient, Soft Start.		

MS - 2000

Dimension

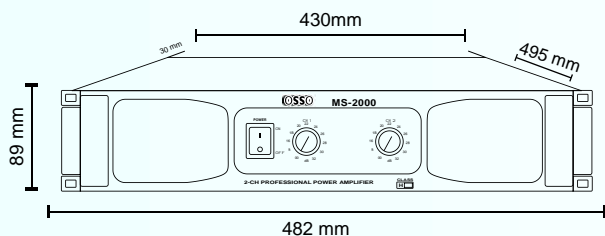

MS - 3000

