





Professional Loudspeaker System

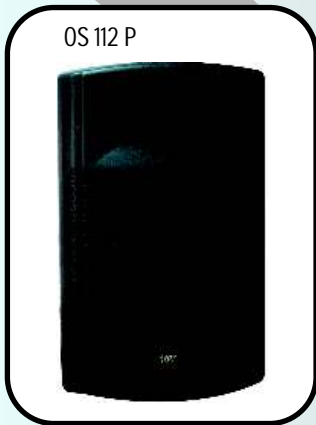

OS 112 P

Type : Plastic powered fullrange loudspeaker system
 Enclosure : Two Way System
 Components : LF 1 x 12 ", Woofer MidBass
 HF 1 x 1" high trandusers voice coil
 Frequency response : 55 Hz - 18 Khz
 Pressure Sensitivity : 1 W@1m : 110 dB, peak spl : 129 dB
 Handling : Two transport handles and stand adapter
 Power Output : 300 w RMS
 Power Consumption : 200 w
 Input ConnectionI : 2 x NL4R - 4 Pole passive speakon loop thru
 Power supply : 220 - 240V/50HZ-60 Hz / 10 A Fuse
 Dispersion : Horizontal x vertical 100 degrees
 Weight kg : 22

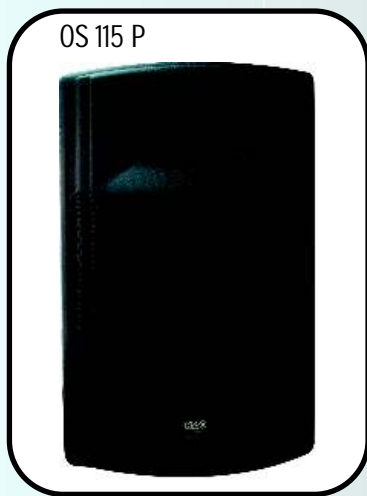

OS 115 P

Type : Plastic powered fullrange loudspeaker system
 Enclosure : Two Way System
 Components : LF 1 x 15 ", Woofer Bass Reflex,
 HF 1 x 1" high trandusers voice coil
 Frequency response : 45 Hz - 18 Khz
 Pressure Sensitivity : 1 WA/1m : 108 dB, peak spl : 129 dB
 Handling : Two transport handles and stand adapter
 Power Output : 450 w RMS
 Power Consumption : 300 w
 Processor controll : 1 x gain - volume - hi - mid - control with variable Parametric Frequency
 for mid x 20 also switch for music or vocal
 Power supply : 220 - 240V/50HZ-60 Hz / 10 A Fuse
 Input connection : 2 x NL4R - 4 Pole passive speakon loop thru
 Dispersion : Horizontal x vertical 100 degrees
 Weight kg : 30

Dimension

OS 112 P

OS 115 P

