




OS 215 E

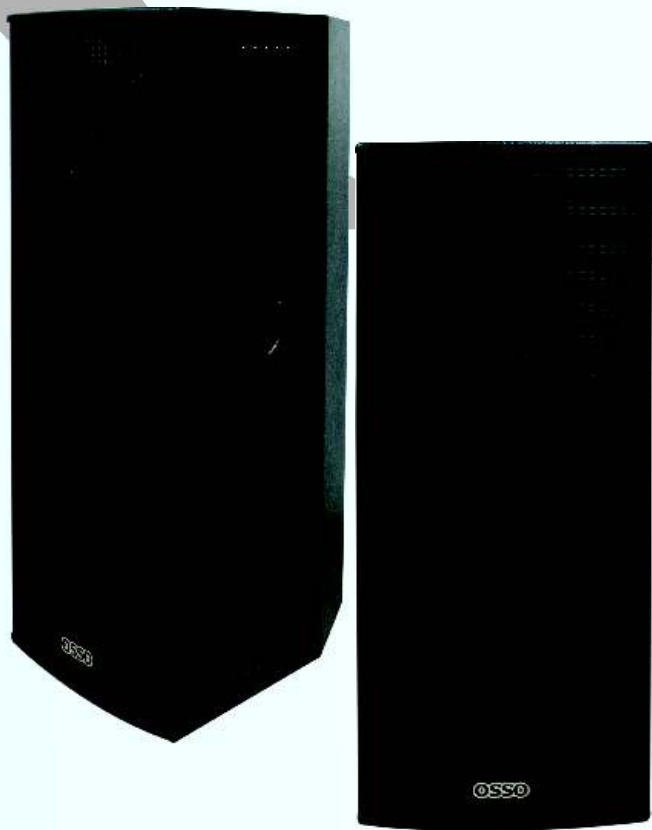

Professional Loudspeaker System

OS 215 H



OS-215E Product Features :

- Type of Enclosure : Trapezoid Fullrange & BI-AMP Two Way System
- Components : LF 2 x 15" Mid Bass Woofer
HF 1 x 1.5" Driver with constant directivity horn
- Power Handling : RMS 800W, Peak 1600W
- Nominal Impedance : 4 ohm
- Frequency Response : 40Hz-17kHz
- Sensitivity : 1W@1m :100dB
Peak SPL : 130dB
- Dispersion (0dB @ 1kHz) : Horizontal 120 degrees, Vertical 100 degrees
- Input Connections : 2×NL4MP-4 pole speakon passive loop thru with crossover & bi-amp switch
- Handling : Two Transport Handles
- Weight (kg) :

OS-215H Product Features :

- Type of Enclosure : Trapezoid Fullrange & BI-AMP Two Way System
- Components : LF 2 x 15" Mid Bass Woofer
HF 1 x 1.5" Driver with constant directivity horn
- Power Handling : RMS 1100W, peak : 2200W
- Nominal Impedance : 4 ohm
- Frequency Response : 40Hz-20kHz
- Sensitivity : 1W@1m :100dB
Peak SPL : 130dB
- Dispersion (0dB @ 1kHz) : Horizontal 120 degrees,
Vertical 100 degrees
- Input Connections : 2×NL4MP-4 pole speakon passive loop thru with crossover & bi-amp switch
- Handling : Two Transport Handles
- Weight (kg) :

OS 215 E

OS 215 H

Dimension

